



SD SERIES, PVC CONDUIT AND FITTINGS			
MODEL NUMBER	ELECTRICAL		WEIGHT PER 100 FEET Lbs./kg)
	TRADE SIZE	INTERNAL DIAMETER	
SD 3/8	3/8"	.472	5 (2.3)
SD 1/2	1/2"	.630	6.6 (3)
SD 3/4	3/4"	.866	10 (4.5)
SD 1	1"	1.102	14 (6.4)
SD 1-1/4	1-1/4"	1.378	18.5 (8.4)
SD 1-1/2	1-1/2"	1.575	22.4 (10)
SD 2	2"	1.968	28.3 (12.8)

Highly flexible PVC conduit system that is ideal for applications where cost, labor, weight and durability are the main design factors.


STRAIGHT FITTINGS		90° ELBOW FITTINGS	
MODEL NUMBER	ELECTRICAL TRADE SIZE	MODEL NUMBER	ELECTRICAL TRADE SIZE
SD 3/8-S	3/8"	SD 3/8-EL	3/8"
SD 1/2-S	1/2"	SD 1/2-EL	1/2"
SD 3/4-S	3/4"	SD 3/4-EL	3/4"
SD 1-S	1"	SD 1-EL	1"
SD 1-1/4-S	1-1/4"	SD 1-1/4-EL	1-1/4"
SD 1-1/2-S	1-1/2"	SD 1-1/2-EL	N/A
SD 2-S	2"	SD 2-EL	N/A

Product Features and Benefits:


- ◆ **IMPROVES PROCESS INSTALLATION:**
 - Highly flexible PVC conduit system.
 - Ideal for applications where cost, labor, weight and durability is important.
- ◆ **RUGGED CONSTRUCTION:**
 - Smooth bore
 - Crush resistant
 - 100% PVC
 - Does not support combustion
- ◆ **CORROSION RESISTANT:**
 - Liquid tight
 - PVC is chemically resistant
- ◆ **CERTIFICATIONS:** UL recognized, CE
- ◆ **CAPACITIES:**
 - Electrical trade sizes from 3/8-inches to 2-inches.
 - Lengths up to 100-foot (30.5m).
 - Rated for continuous operation up to 140 °F (60 °C) ambient temperature.
- ◆ **OPTIONS AVAILABLE (consult factory)**
 - Metric sizes.
 - Straight fittings and 90-degree angle fittings.

DIMENSIONS

Straight Fittings

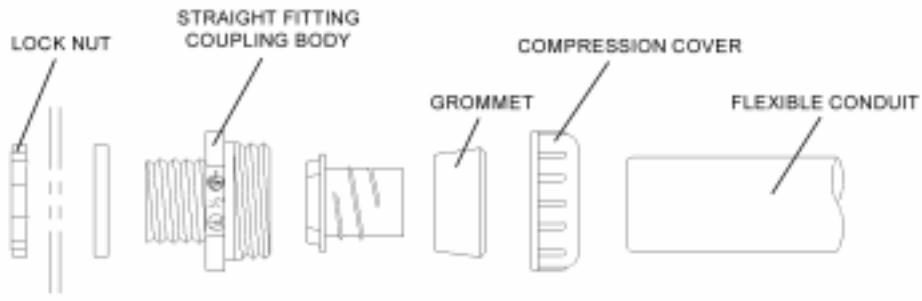

Elbow Fittings

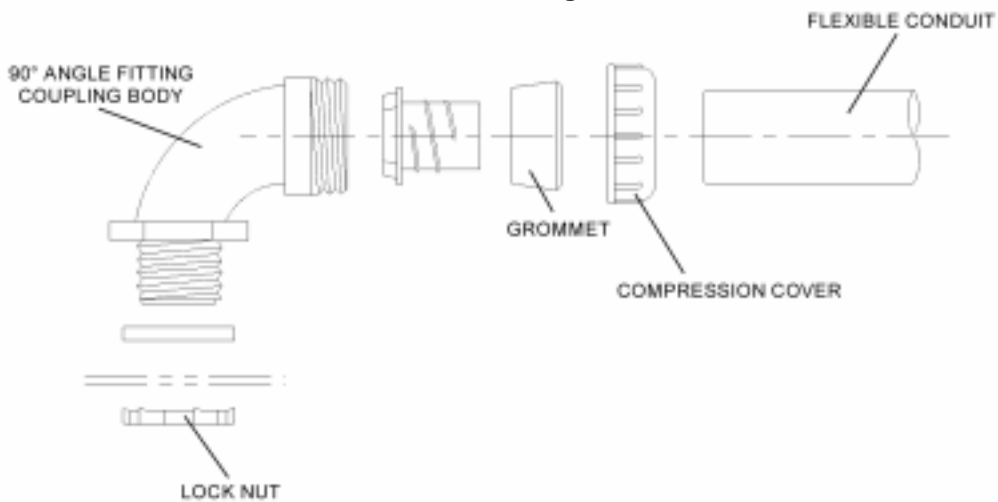

CONDUIT AND FITTINGS ORDERING INFORMATION

Series	Electrical Trade Size (in.)	Fitting Type
SD = conduit or conduit fitting	3/8 = 3/8" 1/2 = 1/2" 3/4 = 3/4" 1 = 1" 1-1/4 = 1-1/4" 1-1/2 = 1-1/2" 2 = 2"	Add to end of part number for fittings only: -S = straight fitting -EL = 90° fitting

ORDERING EXAMPLE:

SD 3/4-EL

SD conduit fitting, 3/4" trade size, 90° fitting.

**PROCESS
TECHNOLOGY**