


W SERIES, THERMOWELLS					
OVER THE SIDE WELLS					
THERMOWELL MATERIAL	DIA.	MODEL NO. 12" LENGTH (305mm)	MODEL NO. 24" LENGTH (610mm)	MODEL NO. 36" LENGTH (915mm)	SHIP WGT. Lbs./kg
Quartz	1/2"	WQ12	WQ24	WQ36	2 (1)
304 SS	1/2"	WF12	WF24	WF36	2 (1)
316 SS	1/2"	WS12	WS24	WS36	2 (1)
Titanium	1/2"	WT12	WT24	WT36	2 (1)
Fluoropolymer (FEP)	1/2"	WX12	WX24	WX36	2 (1)
1/2" NPT THREADED WELLS					
304 SS	1/2"	WFT12	WFT24	WFT36	2 (1)
316 SS	1/2"	WST12	WST24	WST36	2 (1)
Titanium	1/2"	WTT12	WTT24	WTT36	2 (1)
Fluoropolymer (FEP)	1/2"	WXT12	WXT24	WXT36	2 (1)

## Product Features and Benefits:

- ◆ **APPLICATIONS:** Secures and protects temperature control sensors in tanks.
- ◆ **MATERIALS OF CONSTRUCTION:**
  - Quartz.
  - 304 stainless steel.
  - 316 stainless steel.
  - Titanium.
  - Fluoropolymer (FEP) covered 316 stainless steel.
- ◆ **CAPACITIES:**
  - OVER THE SIDE MODELS: 1/2-inch diameter tubing with mounting flange standard.
  - THREADED MODELS: 1/2-inch MNPT standard.
- ◆ **OPTIONS AVAILABLE** (consult factory):
  - Special diameters.
  - Metric sizes.
  - Special lengths.

## DIMENSIONS

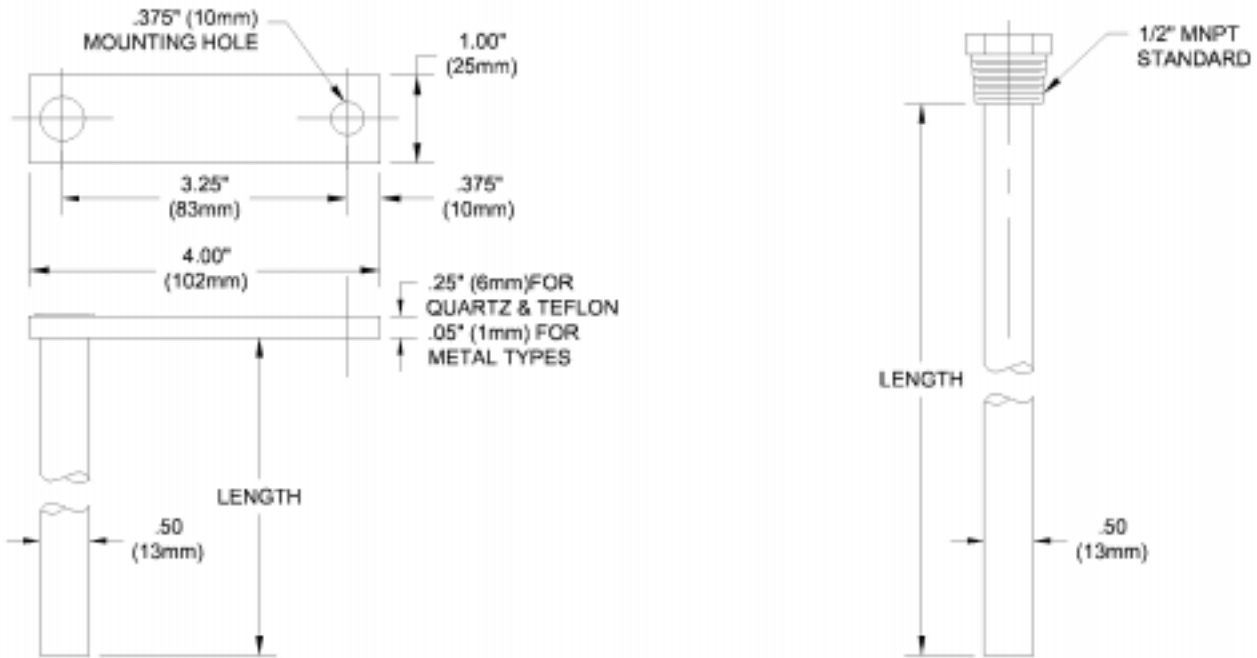

## THERMOWELL ORDERING INFORMATION

Series	Mounting	Length	Options
<p>no designator = flange mount T = 1/2" NPT connection</p> <p>WQ = Quartz WF = 304 Stainless Steel WS = 316 Stainless Steel WT = Titanium WX = Fluoropolymer (FEP)</p>	<p>12 = 12" 24 = 24" 36 = 36" specify custom lengths</p>	<p>X = any special configuration not called out in the part number (specify in clear text)</p>	

### ORDERING EXAMPLE:

WS36

T316 stainless steel thermowell, 36" long.

**PROCESS  
TECHNOLOGY**